

EVO 2

2x1 COLOR-TUNABLE PANEL

EVO is an instrument made to extend your creative possibilities, to set up faster, and to remotely adjust on the fly on any location or any studio.

EVO offers everything you need from a professional color light: industry-leading output-to-weight and output-to-watt ratios, full output from standard 14.4V batteries, wireless control, solid reliability, silent fan-free operation and a weatherproof ergonomic housing.



VE2CIP54 ORDER CODE

EVO 2 Color weatherproof LED panel + yoke

INCLUDES 1x EVO 2 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net, 1x yoke with 28mm junior pin - 16mm baby receiver


VE2CIP54NY ORDER CODE

EVO 2 Color weatherproof LED panel without yoke



INCLUDES: 1x EVO 2 Color LED panel IP54 with DC in XLR-3, 1x DMX in XLR-5, 1x Mini-USB, LumenRadio wireless DMX, VELVET WIFI Art-Net

PHOTOMETRICS 5600K/ 3200K


1m	7000 lux	3m	900 lux	5m	167 lux
3ft	650 fc	10ft	83 fc	16ft	15.5 fc




5620K

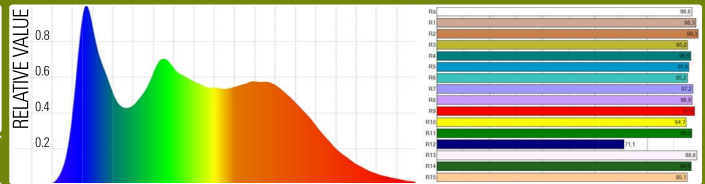

3226K

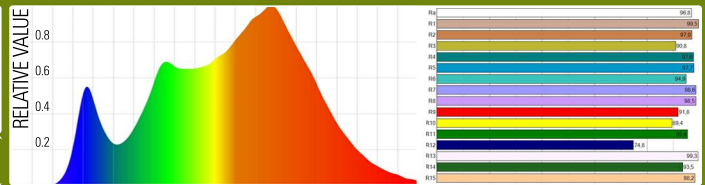

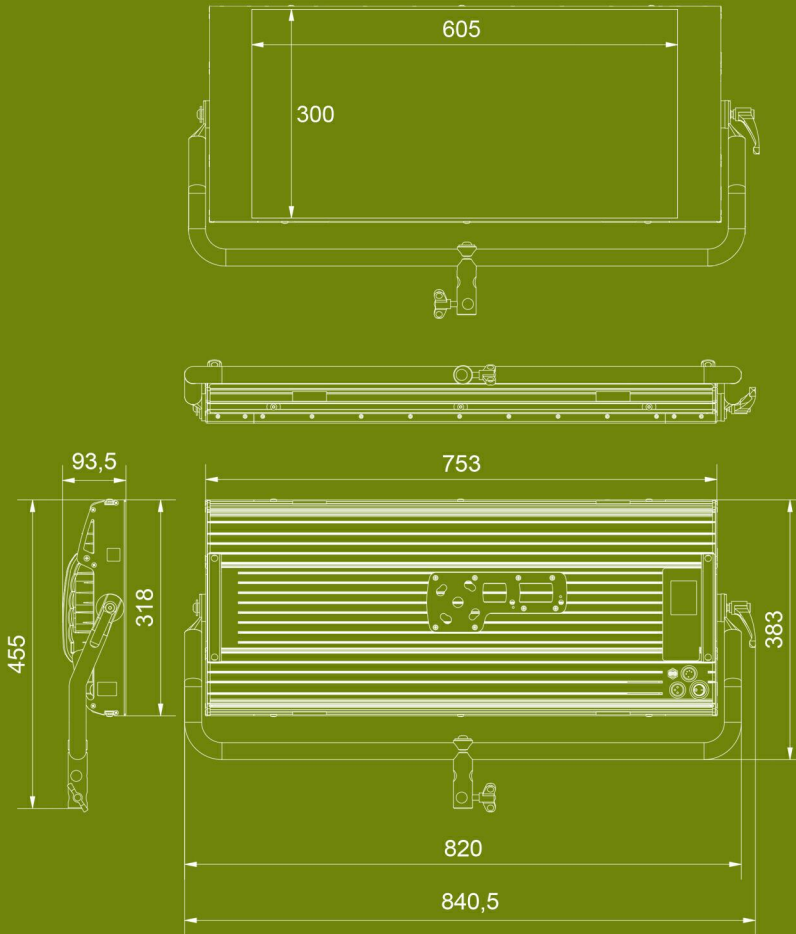

TECHNICAL SPECIFICATIONS

BEAM ANGLE COLOR TEMPERATURE LIGHT INTENSITY GREEN-MAGENTA COLOR SPECTRUM	115°. Continuously adjustable from 2500K to 10.000K. Dimmable 0 to 1000, smooth and flicker-free. Continuously adjustable from full minusgreen to full plusgreen Full color spectrum R+G+B+W+CW with hue, saturation, and base color temperature control.
CONTROL COLOR MODES	CCT, HSI+, GEL, RGB+W+CW and EFFECTS modes. Adjustments are laid over a base white light and can be transferred from one mode to another.
CONTROL	Onboard control with color display, DMX/RDM through XLR5, LumenRadio wireless DMX/RDM, Art-Net, Wi-Fi, and the VELVET Goya mobile app.
CR INDEX & TLCI	Exceeds 95 CRI and TLCI.
DIMENSIONS PANEL WEIGHT PANEL + YOKE WEIGHT	753 x 318 x 92mm / 29.6 x 12.5 x 3.6 inches. 6.9 kg / 15.2 lbs. 7.6 kg / 16.7 lbs.
POWER 200W POWER SUPPLY	1.8 Amps at 110 VAC 24-35V DC (XLR3). VLock/ Gold Mount battery plate 90-264V AC 50/60Hz
LED RATED LIFE COOLING PROTECTION	More than 50,000 hours. Silent and fan-free passive cooling. IP54 rain and dustproof, indoor or outdoor use.
CONSTRUCTION & FINISH RIGGING OPTIONS	Fixture and yoke made of 100% black powdercoated extruded and sheet aluminum. Aluminum yoke with 16mm baby receptacles combined with 28mm junior pin, center ball-head mount, multiple ¼"-20 rigging points, double vertical yoke, pole-operated yoke.



Copyright 2019 VELVET. EVO 2 Weatherproof information (product code VE2CIP54 & VE2CIP54NY) is published by THELIGHT S.L.

Technical data and offerings are subject to change without notice. All rights reserved.
 VELVET & EVO is a registered trademark by THELIGHT S.L. Carrer de la Cerdanya 11-A 08192 Sant Quirze del Vallés. BARCELONA,
 SPAIN. www.velvetlight.tv